




GN3000



HIGH SPEED OVERLOCK SEWING MACHINE


TYPICAL

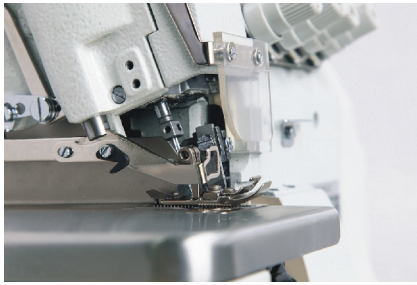

AC Servo Motor, Small size, low power consumption, compact excellent controllability, high precision



Integrated housing, reasonable body structure could solve the housing assembly surface of the oil spill problem. Whole front part of the seamless, beautiful overall appearance

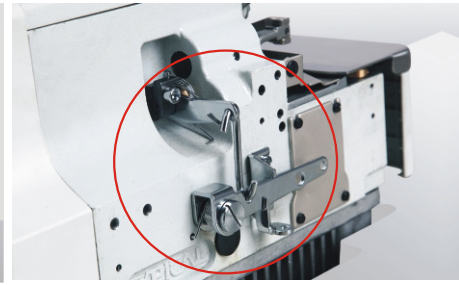

Using two shifts of high-style design at the presser foot shaft axis, avoid fabric push back, suit for high-speed rotation. A variety for different fabrics

GN3000

HIGH SPEED OVERLOCK SEWING MACHINE

GN3000

GN3000-3		504	7000	1	3	0.7-3.8	4	vertical	—	5.5	0.7-1.7	
	B	504	7000	1	3	0.7-3.8	1.5	vertical	—	5.5	0.7-1.7	
	C	504	7000	1	3	0.7-3.8	4	vertical	—	5.5	0.7-1.7	
	/P3D	504	7000	1	3	0.7-3.8	4	vertical	—	5.5	0.7-1.7	
	/ET-1A	504	7000	1	3	0.7-3.8	4	vertical	—	5.5	0.7-1.7	
GN3000	2E	503	7000	1	2	0.7-3.8	1.5	vertical	—	5.5	0.7-1.7	
	3E	504	7000	1	3	0.7-3.8	1.5	vertical	—	5.5	0.7-1.7	
GN3000-4	H/P3D	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	H(2x5)	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	H(2x7)	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	XH	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	H-A	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	C	514	6500	2	4	0.7-3.8	4	vertical	2	5.5	0.7-1.7	
	H/ET-1A	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
	G	2X401	6500	2	4	0.7-3.8	4	vertical	5	5.5	0.7-1.7	
GN3000-5		516	6500	2	5	0.7-3.8	4	vertical	3	5.5	0.7-1.7	
	3x5	516	6500	2	5	0.7-3.8	5	vertical	3	5.5	0.7-1.7	
	5x5	516	6500	2	5	0.7-3.8	5	vertical	5	5.5	0.7-1.7	
	/BB	516	6500	2	5	0.7-3.8	4	vertical	3	5.5	0.7-1.7	
	H	516	5500	2	5	0.7-5.3	6	vertical	5	6	0.6-1.3	
	H-A	516	5500	2	5	0.7-5.3	6	vertical	5	6	0.6-1.3	
	/P3D	516	6500	2	5	0.7-3.8	5	vertical	3	5.5	0.7-1.7	
	/ET-1A	516	6500	2	5	0.7-3.8	5	vertical	3	5.5	0.7-1.7	
GN3000-6		514+401	6000	3	6	0.7-3.8	4	vertical	3+2	6	0.7-1.7	
	/BB	514+401	6000	3	6	0.7-3.8	4	vertical	3+2	6	0.7-1.7	
	/P3D	514+401	6000	3	6	0.7-3.8	4	vertical	3+2	6	0.7-1.7	
	/ET-1A	514+401	6000	3	6	0.7-3.8	4	vertical	3+2	6	0.7-1.7	
GN3000D-3		504	6000	1	3	0.7-3.8	4	vertical	—	5.5	0.7-1.7	
GN3000D-4	H	514	6000	2	4	0.7-3.8	4	vertical	2	6	0.7-1.7	
GN3000D-5		516	5500	2	5	0.7-3.8	4	vertical	3	5.5	0.7-1.7	
GN3000D-6		514+401	6000	3	6	0.7-3.8	4	vertical	3+2	6	0.7-1.7	

The external looks and technical norms of our products are subject to change without notice.



Certificate of the international ISO9001



Certificate of the international CE



Certificate of the international CE



Certificate for Eco-labeling Product



Certificate for Energy Conservation Product

Camsew-SewRent
5 Oxford Drive Bundoora Vic. 3083

Phone: Ron 0419 884 920

XI'AN TYPICAL INDUSTRIES CO., LTD.

ADD: No.335 South Taibai Road Xi'an, 710068 PR. China

TEL: +86-29-88279093/88279150/88279151

FAX: +86-29-88249715/88245215

E-mail: sales@typicalinternational.com

http://www.chinatypical.com/en/index.asp